


UP2/OIL Gear pump for lubricating oil



Quick Overview


Self-priming electric pumps with helical bronze gears for transferring lubricating oils and viscous liquids. Nickel-plated brass body and stainless steel shaft. Particularly suitable for draining engine sumps with the special tubes kit (OK1) and for engines lubricating operations.

Part n.	Name	Volta ge (V)	Cons umpt ion (A)	Fuse (A)	Self- primi ng (m)	Press ure (bar)	Flow rate d.6 (l /min)	Flow rate d.8 (l /min)	Flow rate d.13 (l/mi n)	Ports (BSP)	Hose (mm)	IP Pr otect ion	Mot or pow er (W)	Weig ht (kg)
16422012	UP2/OIL	12	2,5	3	1	1,5	0,3	0,9	3,3	3/8"	12	67	90	1,2
16422013	UP2/OIL	24	1,3	1,5	1	1,5	0,3	0,9	3,3	3/8"	12	67	90	1,2

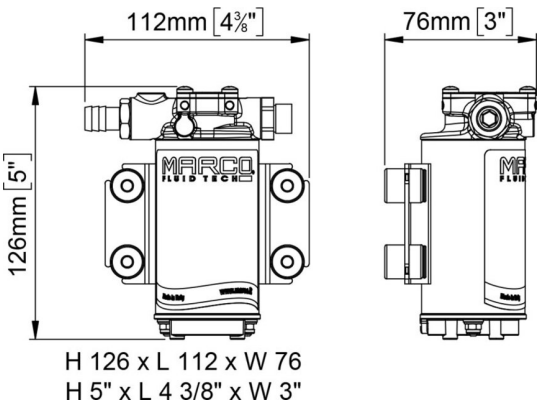




R6400065

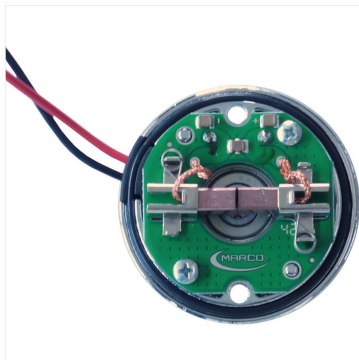

R6400080



R6400015

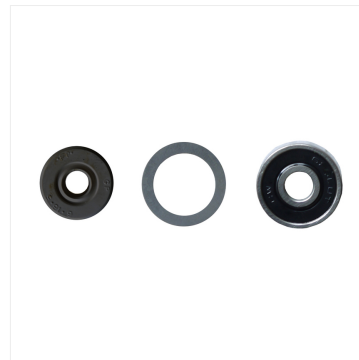

R6400095



R6400031



OK1 Tube kit for oil pumps