


Features:

- Output constant voltage
- High efficiency up to 82%
- Protections: Short circuit/ over loading/ over temperature/ over Voltage
- Cooling by free air convection
- IP67 design for outdoor installation
- 3 years warranty

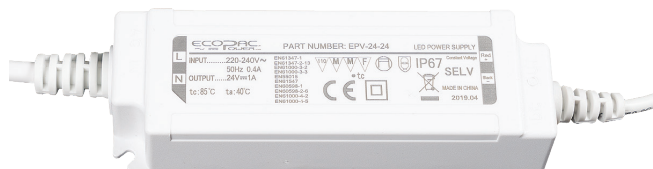

Models

	EPV-24-12	EPV-24-24
Output Specifications		
Output Voltage	12V	24V
Voltage Accuracy	±5%	
Output Current	2A	1A
Rated Power	24W	
Input Specifications		
Input Voltage	200-240VAC	
Frequency Range	50Hz	
Full Load Efficiency (Typ.)	82%	
Power Factor Correction	>0.5, Full Load 240V	
Input Current	0.4A Max	
Inrush Current	40A @Full Load, 240VAC	
Inrush Current (T50% value)	26.4A, Inrush current width 780μs	
No Load Power Consumption	≤0.5W	
Protection		
Over Load	Protection type: Auto Restore	
Short Circuit	Protection type: Auto Restore	
Over Temperature	Protection type: Auto Restore	
Environment		
Working TEMP.	-10~+40°C	
Working Humidity	20-90% RH, non-condensing	
Life Time	>30,000h @40°C	

Environment

Storage Temperature -20~+60°C

Safety & EMC

Safety standards EN61347-1, EN61347-2-13, EN60598-1, EN60598-2-6

EMI EN55015, EN61000-3-2, Class C EN61000-3-3

EMS EN61547, EN61000-4-2, EN61000-4-5

Other Specifications

Size 121 x 37 x 26 mm

Packing 355 x 320 x 275 mm (50PCS)

Weight 0.186 Kg

Mechanical Specifications

