


SPECIFICATION

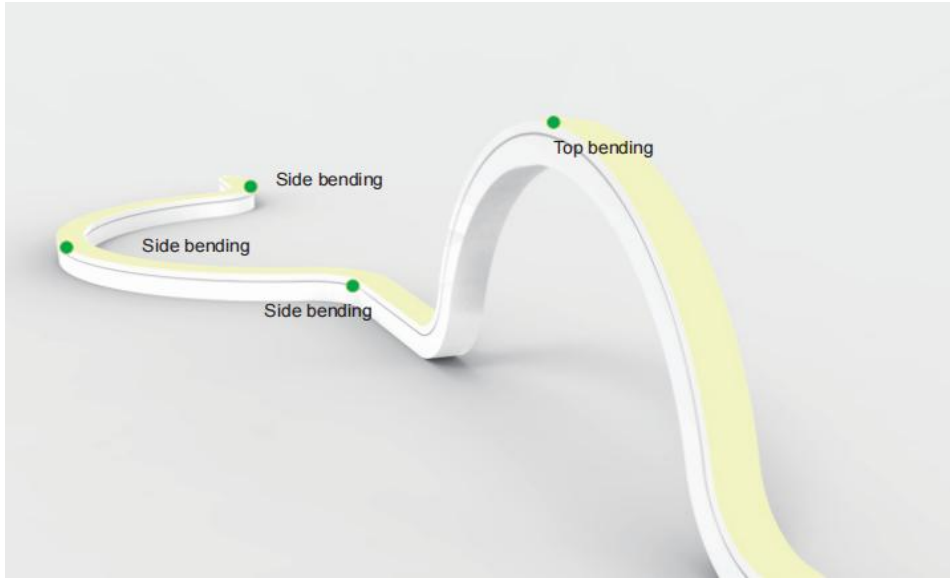

NFS-1010F (3D Freely Bending)

3D Bending
Vertical Bending & Horizontal Bending

5 years warranty	5M [per roll]	100mm [Min section]	90+ [High CRI]	24V DC	CE	RoHS
Beam Angle 120°	Vertical Bending 120mm	Horizontal Bending 200mm	UV Resistant	Saltwater Resistant	IP67 Protection	



FEATURES

3D bending neon flex, IP67 silicone extrusion
 Dot free and perfectly homogeneous linear LED light
 10mm x 10mm / 0.4" x 0.4" (W x H) +/-0.5mm
 Vertical and horizontal bending with bending diameter over 120mm (vertical) and over 200mm (horizontal)
 Offering solutions for any indoor/outdoor organic facade geometry.



OPTICAL PARAMETER

Artical No.	Color Temp	LM/M	Power/M	LM/0.5	Power/0.5M	Light Efficiency	Mini Section	Max Run	CRI (Ra)	Color Tol.
NFS-1010F	2700K	320LM	8W	295LM	4W	40LM/W	Freely Cut	5m	90+	SDCM<3
	3000K	360LM	8W	300LM	4W	45LM/W	Freely Cut	5m	90+	SDCM<3
	4000K	400LM	8W	345LM	4W	50LM/W	Freely Cut	5m	90+	SDCM<3

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

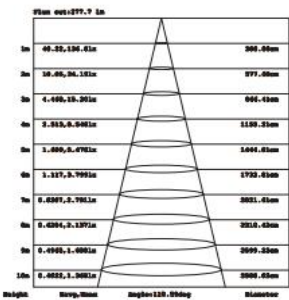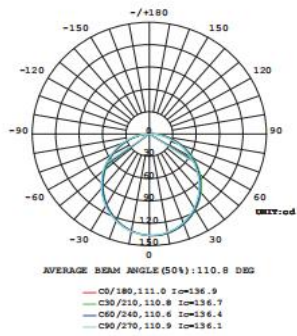


DIMENSION AND OUTLET DIRECTION

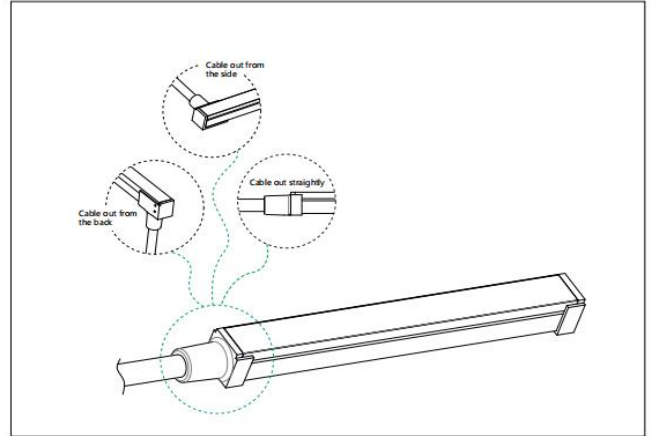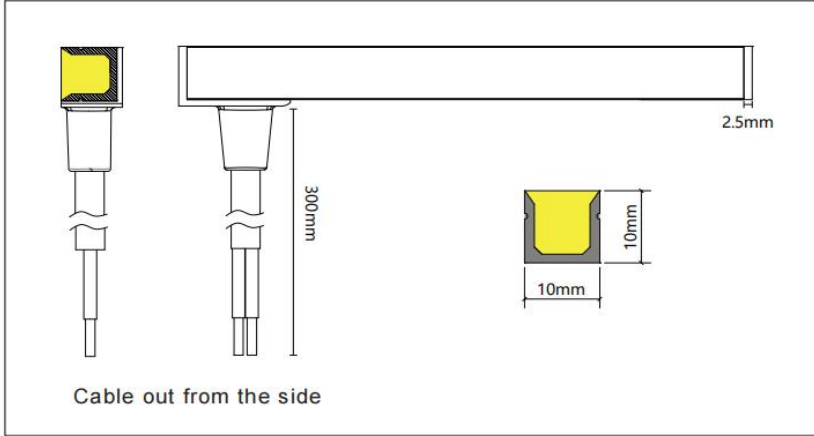

INSTALLATION ACCESSORIES

Aluminum Buckle

12×12.5×25mm



Length	Buckle	Screw
1000mm	4pcs	4pcs




Screw

15×3.5mm




Aluminum profile

12×12.5×1000mm




Length	Screw
Aluminum profile 1000mm	3pcs

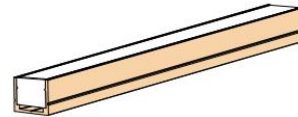


Screw

15×3.5mm



Flexible channel


12.1×10.6mm




Length	Buckle	Screw
1000mm	4pcs	4pcs




CONNECTING ACCESSORIES




End cap



End-straight




PACKAGING

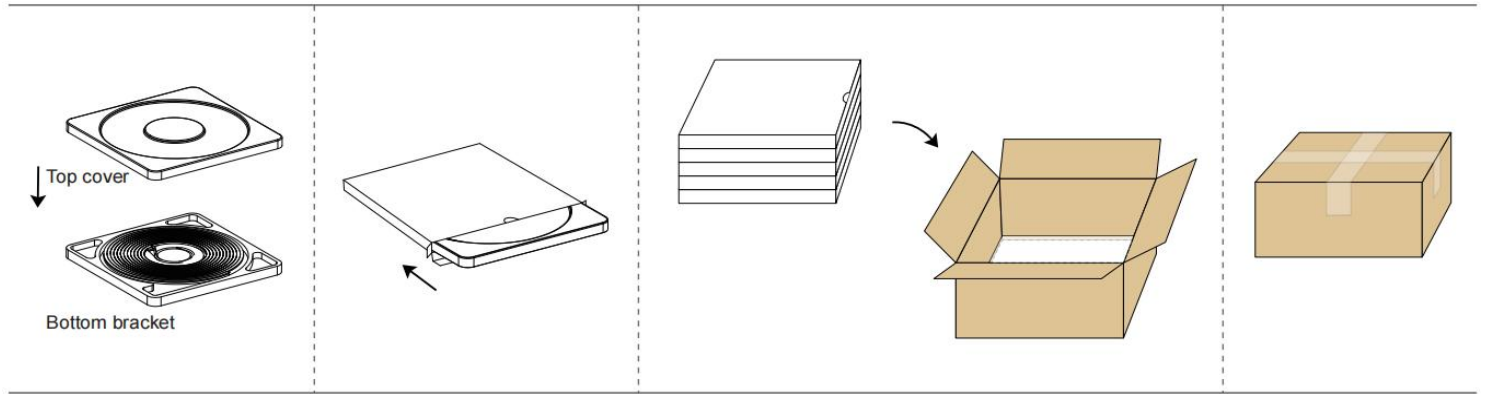



Light Length	Plastic Box Dimension	White Box Dimension	No. Of White Box	Carton Dimension
1M	275 x 275 x 30.5mm	275 x 35 x 275mm	40pcs	570 x 570 x 380mm
5M	385 x 385 x 35.5mm	385 x 39 x 385mm	10pcs	405 x 405 x 420mm

INSTRUCTION AND CAUTION



Light Profile

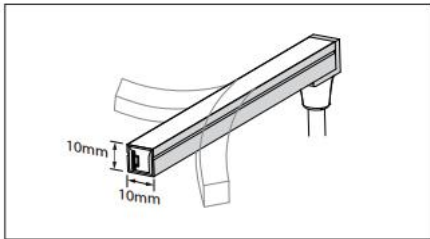

Bending Direction

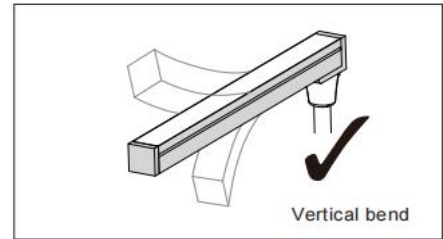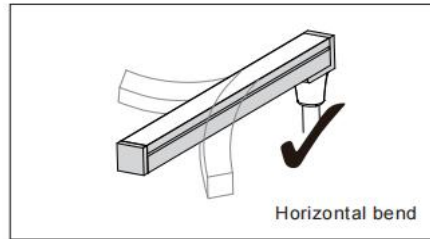

Correct Bending Way

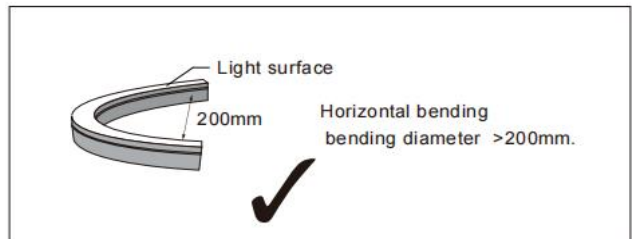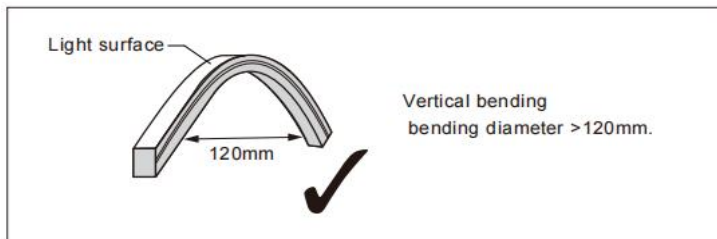

Incorrect Bending Way

