








	PO. 60.140	PO. 60.190
A (mm)	1400	1900
B (mm) Ø	60	60
C (mm) Ø	125	125
D (mm) Ø	90	90
E (mm)	34	34
POLE ALLUMINUM (Kg)	≈ 4,5	≈ 6
POLE CARBON (Kg)	≈ 4	≈ 5,5
FIXED POLES WITH TENSIONING SYSTEM		



OPTION 1
with upper fixing



OPTION 2
with lower fixing

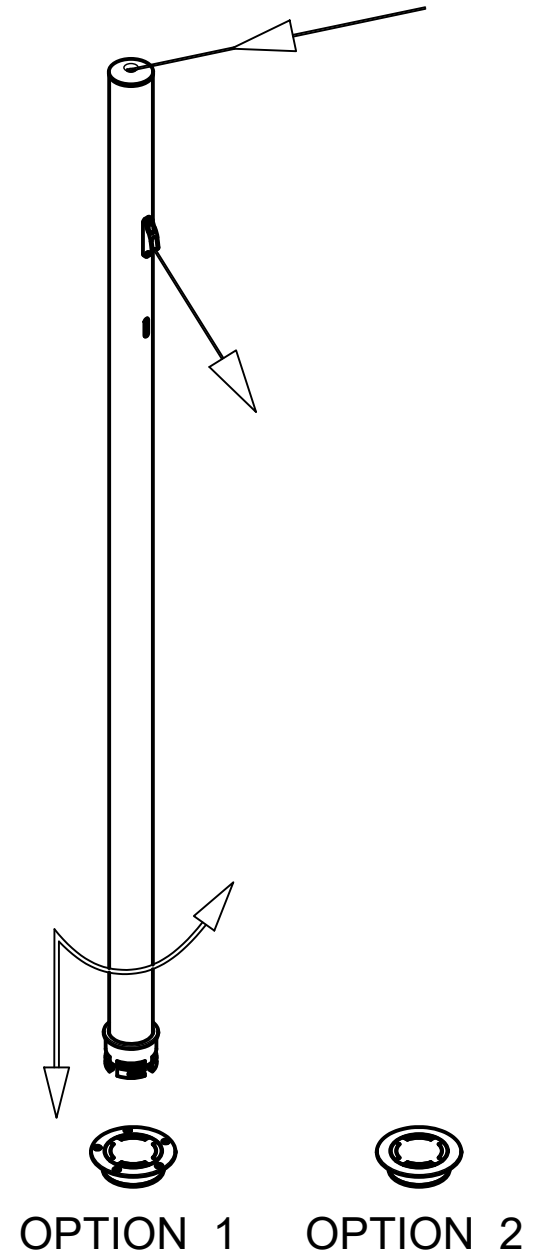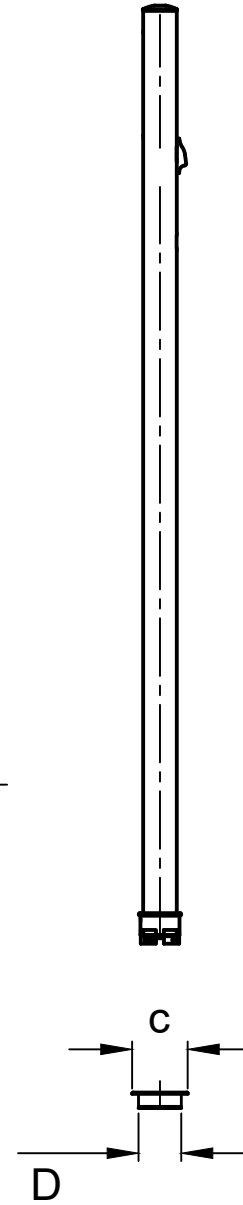
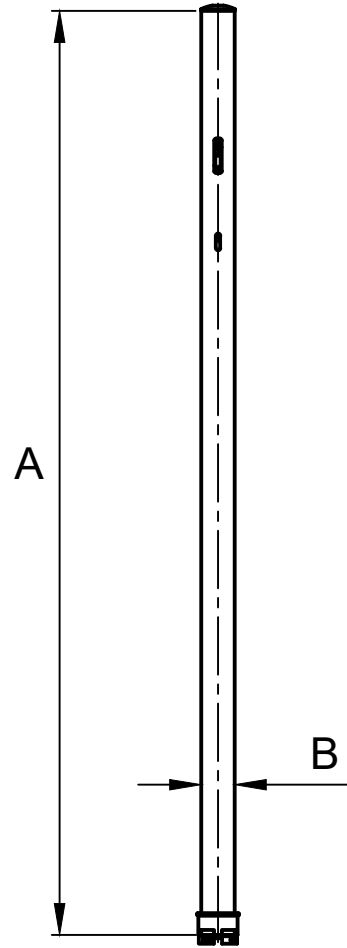


Product



FIXED POLE SYSTEM

SHADOWING POLE




	PO.100.220
A (mm)	2200
B (mm) Ø	100
C (mm) Ø	150
D (mm) Ø	116
E (mm)	20
POLE ALLUMINUM (Kg)	≈ 9
FIXED POLES WITH TENSIONING SYSTEM	



OPTION 1
with upper fixing



OPTION 2
with lower fixing

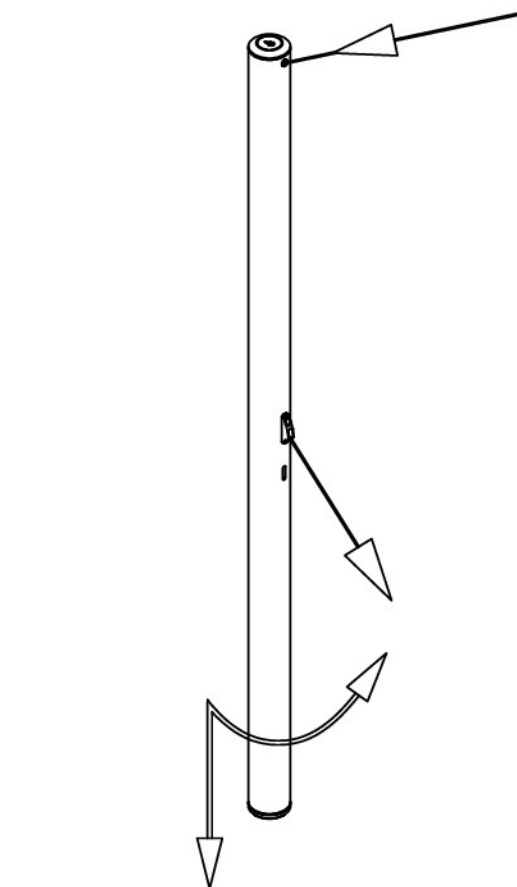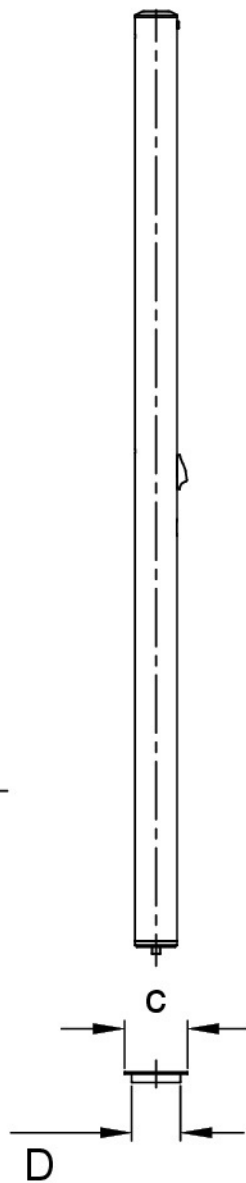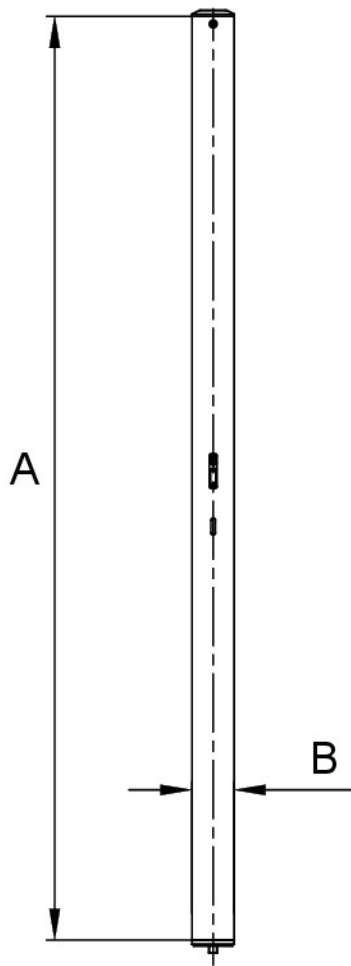

OPTION 1



OPTION 2





Product



FIXED POLE SYSTEM

SHADOWING POLE




	PO. 60.220 CARBON	PO. 60.220 ALUMINUM
A (mm)	2200	2200
A1 (mm)	1600	1600
B (mm) Ø	60	60
B1 (mm) Ø	54,5	50
C (mm) Ø	125	125
D (mm) Ø	90	90
E (mm)	34	34
T (mm)	600	600
WEIGHT (Kg)	≈ 4	≈ 5
TELESCOPIC VERSION WITHOUT TENSION SYSTEM		



OPTION 1
with upper fixing



OPTION 2
with lower fixing

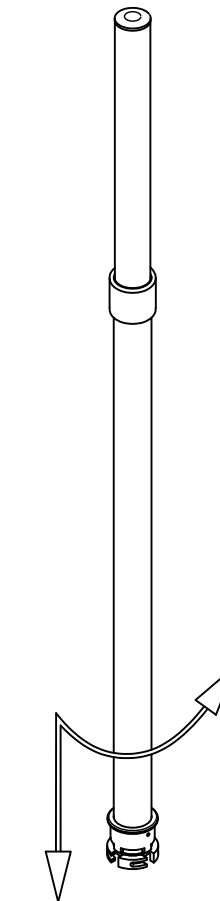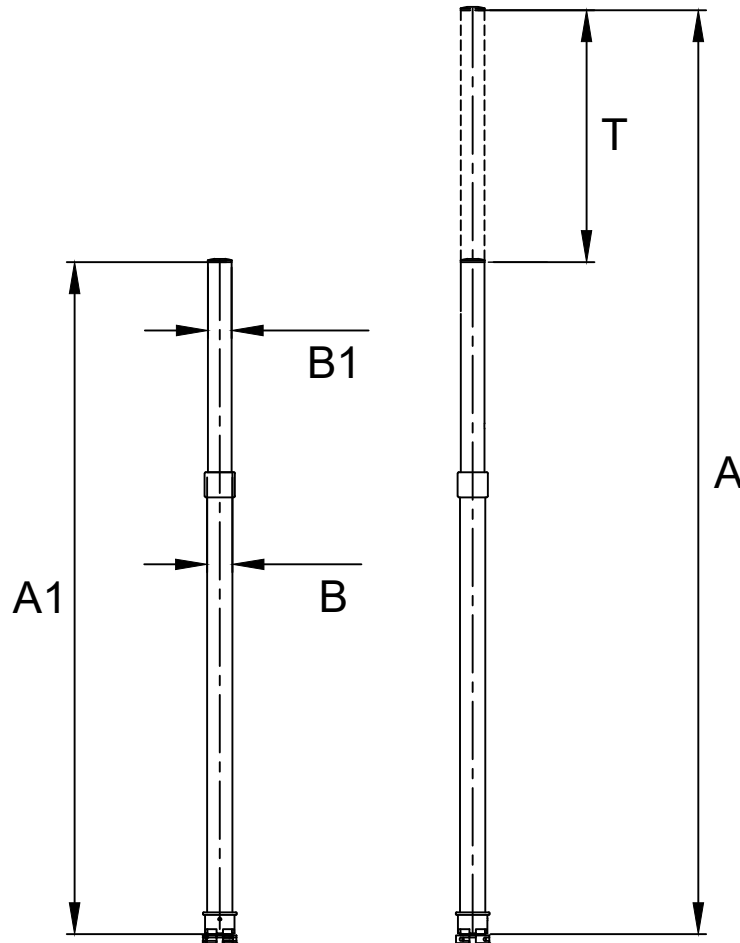

OPTION 1



OPTION 2



Product

TELESCOPIC POLE SYSTEM

SHADOWING POLE