



UP14/E-DX Electronic dual pump system + PCS 92 l/min




Quick Overview

Self-priming water pressure systems with two connected pumps with electronic control Speed motor related to the flow rate. Delayed start of the auxiliary pump. Reduced consumption and noise. Accumulator tank is not required. Protected against overloads. Pump functions monitored by 2 led. "Empty tank" signal and shut-off device.

Part n.	Name	Voltage (V)	Consumption (A)	Fuse (A)	Self-priming (m)	Pressure (bar)	Flow rate (l/min)	Ports (BSP)	Motor power (W)	Weight (kg)
16469113	UP14/E-DX	24	18	30	3	3,5	92	1"	2x400	17



R6400076

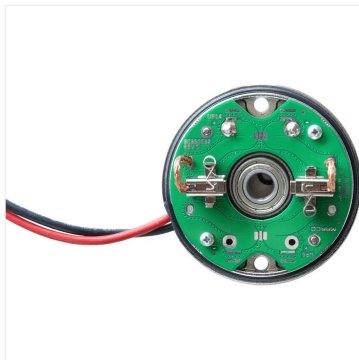

R6400078



R6400082



R6400094

Accessori



AT1 Accumulator tank, 2 l , white



AT2 Accumulator tank, 5 l , white



ATX2 Stainless steel accumulator tank 2 l with 1/2" T-nipple



RJ11 Black cable with coupler for SCS / PCS