



Lifting capacity (Kg)	110	100	150
A (mm)	1910	2230	2630
B (mm)	430	430	460
C (mm)	242	242	242
D (mm)	1140	1320	1680
E (mm)	600	600	600
F (mm)	330	330	335
G (°)	90	90	90
H (mm)	300	300	300
W (mm)	500	500	532
Y (mm)	185	185	185
Weight (Kg)	115	140	150

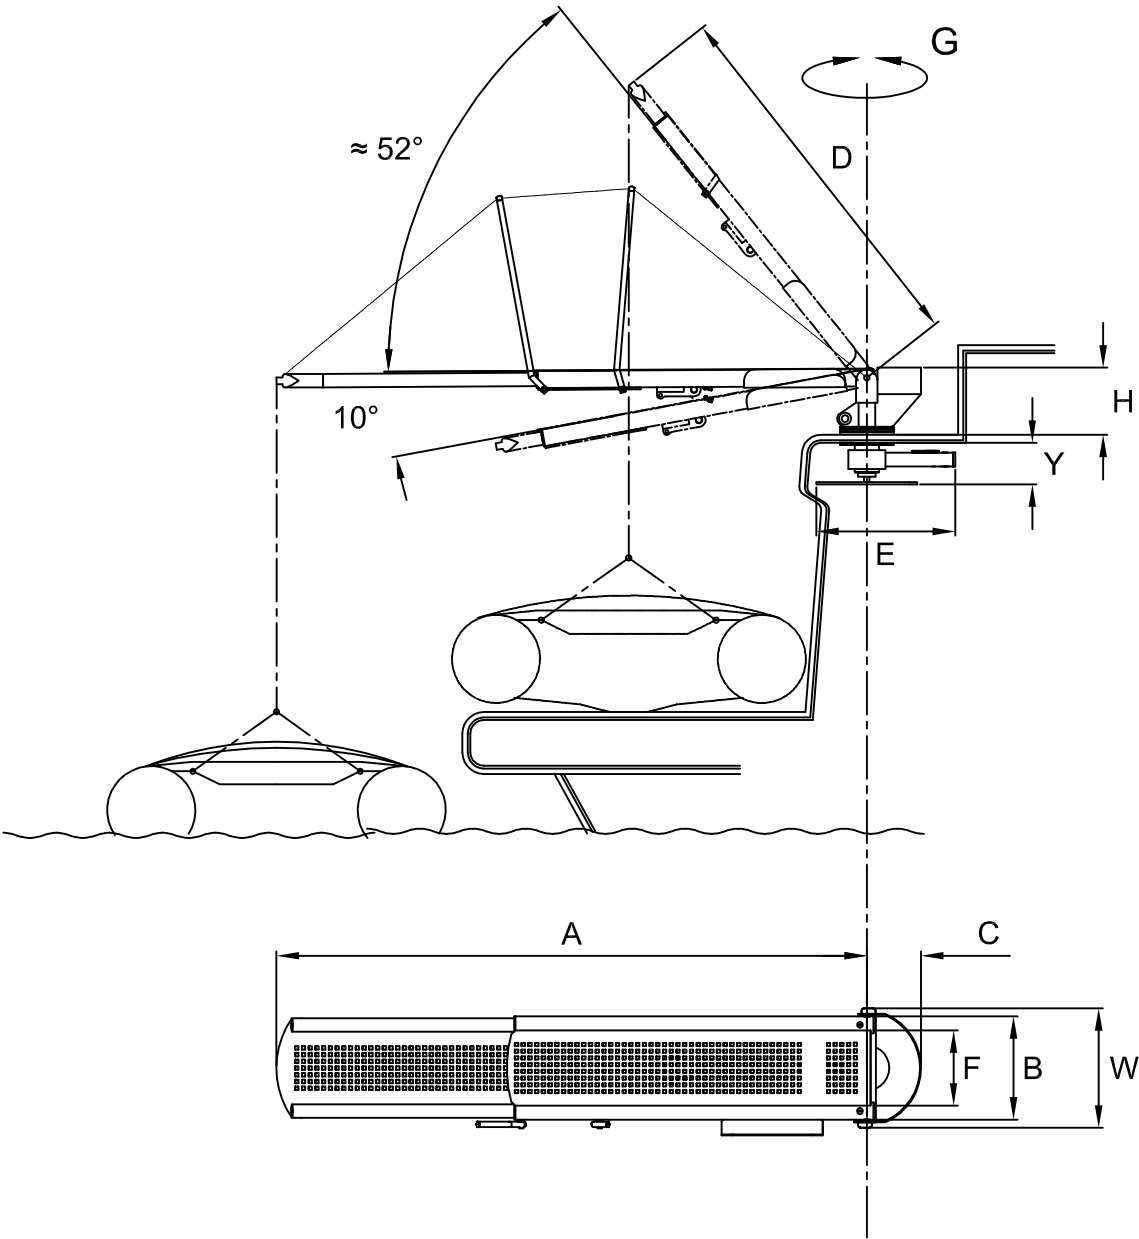

Lifting capacity (Kg)	110	100	150
A (mm)	1880	2230	2540
B (mm)	430	430	460
C (mm)	200	200	200
D (mm)	1140	1320	1680
E (mm)	400	400	400
F (mm)	310	310	335
G (°)	90	90	90
H (mm)	300	300	300
W (mm)	500	500	532
Y (mm)	150	150	150
Weight (Kg)	125	155	165

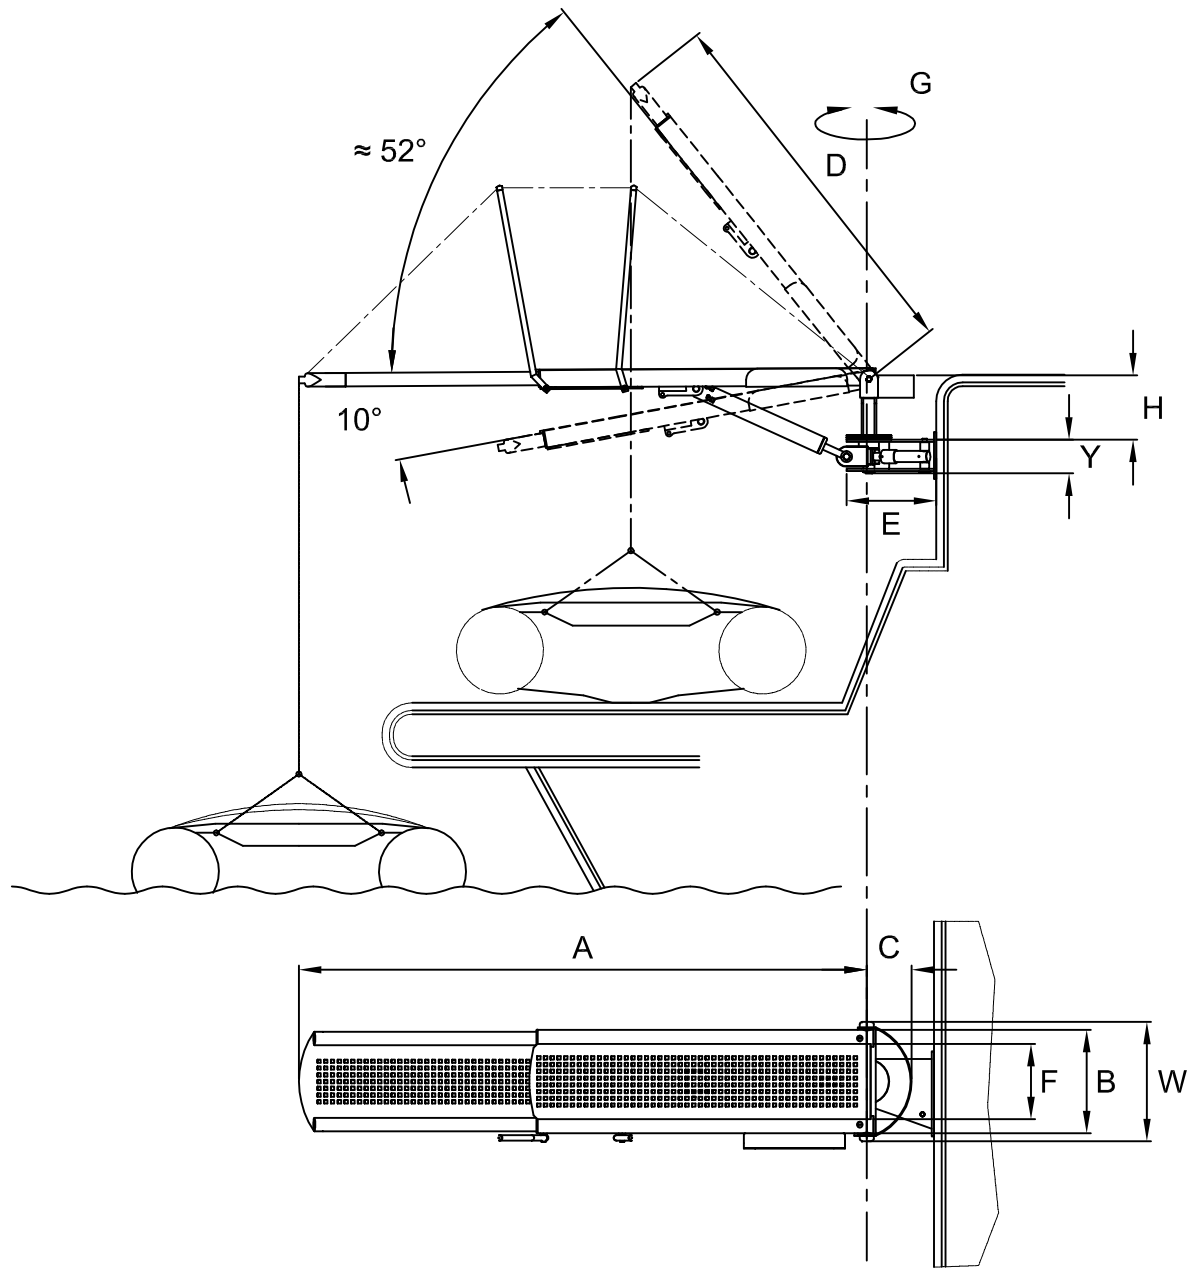

Product

PI 464 SMART - Wall Mounted

External Rotating Hydraulic Passerelle

Questo disegno è di proprietà della Besenzone S.p.a. A norma di legge è vietato l'uso o cessione a terzi senza specifica approvazione scritta della Besenzone S.p.a. This drawing remains the property of Besenzone S.p.a. and should not be used or passed on to a third party under any circumstance without the written permission of Besenzone S.p.a.