


TOP VIEW LED NEON FLEX GEN II



On Request Pre-cut lengths with IP68 connectors

Can be installed in continuous 20m length if powered from both ends

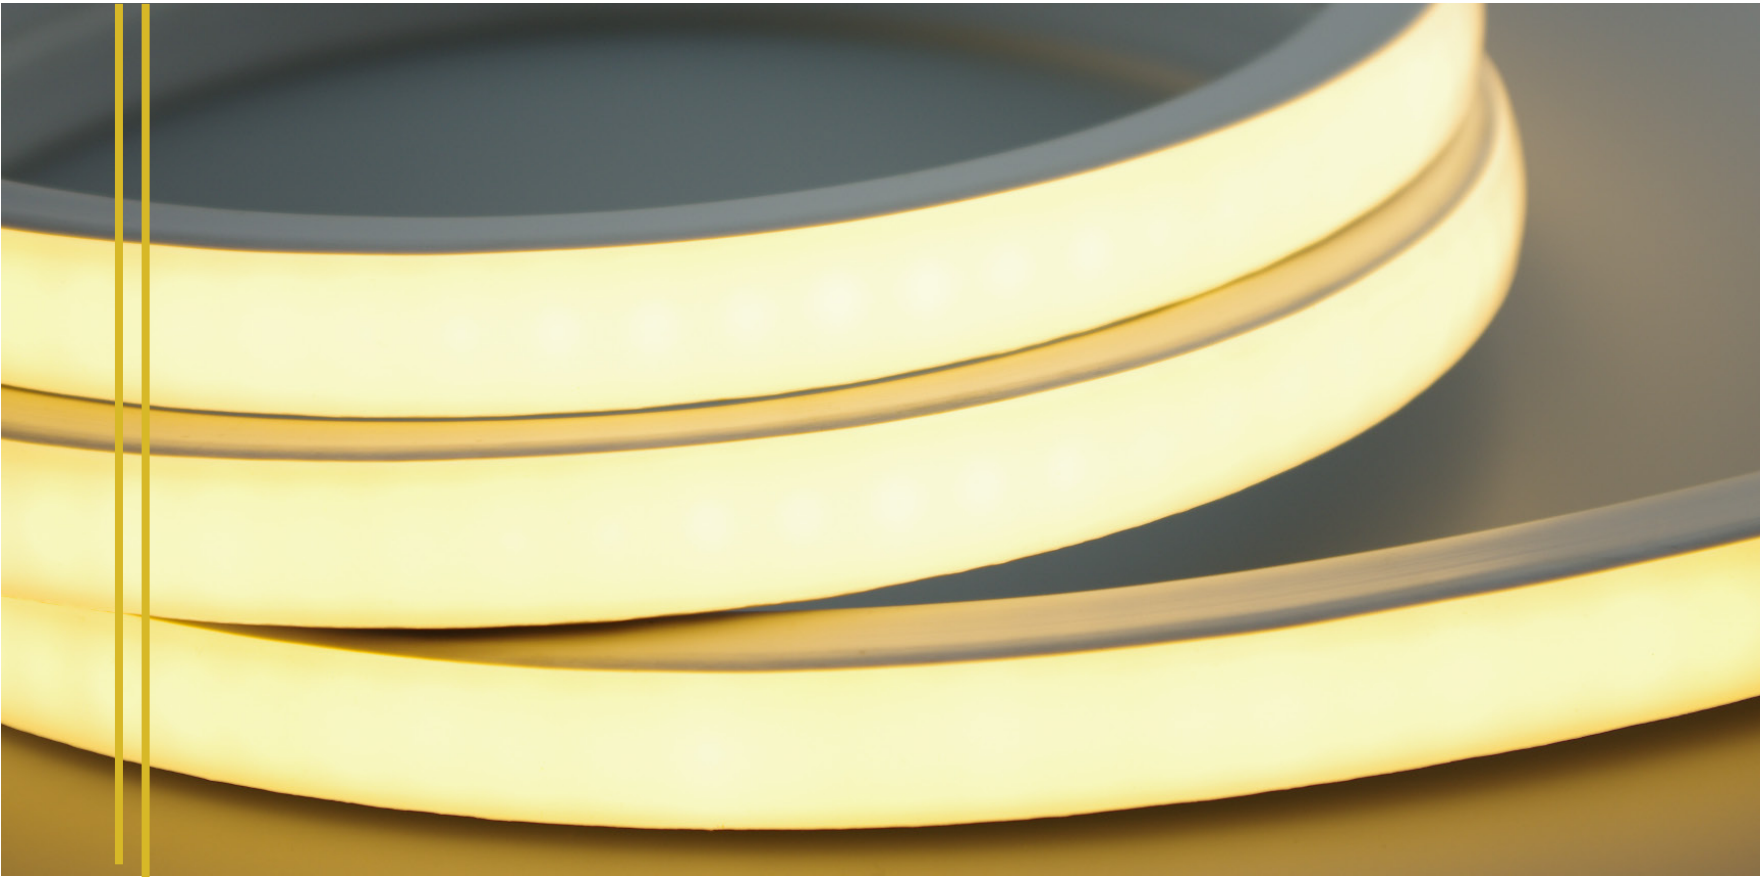

Photobiological risk group EN 62471




LED

24 VDC
8.8 W/m W/B/G/Y/A
83.3mm CUTTING
MAX LENGTH 20M
DIMMER
MAX 320 LUMEN/m
144 LED/m
BENDING RAD. 120mm



Compatible Drivers For 240V Use

ALI230V24V145W 240V - 24Vdc, 145W (up to 20m)




Aluminium U-Clip 50mm
NFT.U_CLIP



Aluminium U-Channel 1m
NFT.U_CHANNEL_1M

SINGLE COLOUR LED 24V

NFT3528.120-17-24V.2700	Warm white 2700K
NFT3528.120-17-24V.3000	Neutral white 3000K
NFT3528.120-17-24V.4000	Daylight white 4500K
NFT3528.120-17-24V.6000	Cool white 6000K
NFT3528.120-17-24V.RED	Red
NFT3528.120-17-24V.ORA	Orange
NFT3528.120-17-24V.BLUE	Blue
NFT3528.120-17-24V.GRE	Green
NFT3528.120-17-24V.YEL	Yellow
NFT3528.120-17-24V.AMB	Amber




Max. length 20 metres if powered from both ends, 10 metres if powered from one end.
Min. cutting length: white, yellow, blue, green, amber = 83.3mm

Available Connectors:



DIY IP67 Connector
Available in following specification:
- Bottom
- Side [left or right]
- End [straight]



IP68 Injection Moulded Connector
Available in following specification:
- Bottom
- Side [left or right]
- End [straight]