


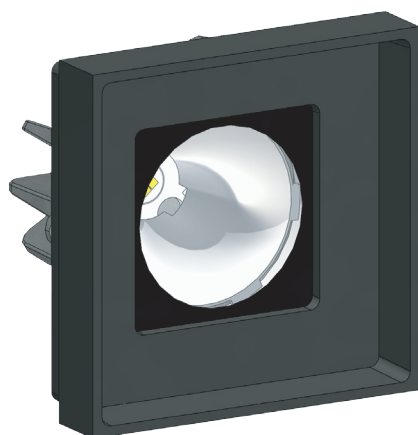

Prometeo QRG

Interior and exterior spotlight with galvanised brass body, tempered glass, aluminium heatsink anodised, directional reflector/lens.

Nichia LED chip with CRI value >90

Finish	Black RAL9005
LED Colour Temperature	2700K 3200K 4000K
LED Colour	RED

Code	LED Colour	Lens
5185BLKLED2700.9	2700K	44°
5185BLKLED2700.9M	2700K	29°
5185BLKLED2700.9N	2700K	14°
5185BLKLED3200.9	3200K	44°
5185BLKLED3200.9M	3200K	29°
5185BLKLED3200.9N	3200K	14°
5185BLKLED4000.9	4000K	44°
5185BLKLED4000.9M	4000K	29°
5185BLKLED4000.9N	4000K	14°
5185BLKLEDR	RED	44°



Gruppo di rischio Fotobiologico EN 62471
Photobiological risk group EN 62471
Groupe de risque photobiologique EN 62471



PowerLED

10/30 VDC
5 WATT
DIMMER 6018

CRI >90

Indice di resa cromatica
color rendering index
indice de rendu des couleurs

