


COB LED STRIP



On Request Pre-cut lengths with soldered connectors and power cable

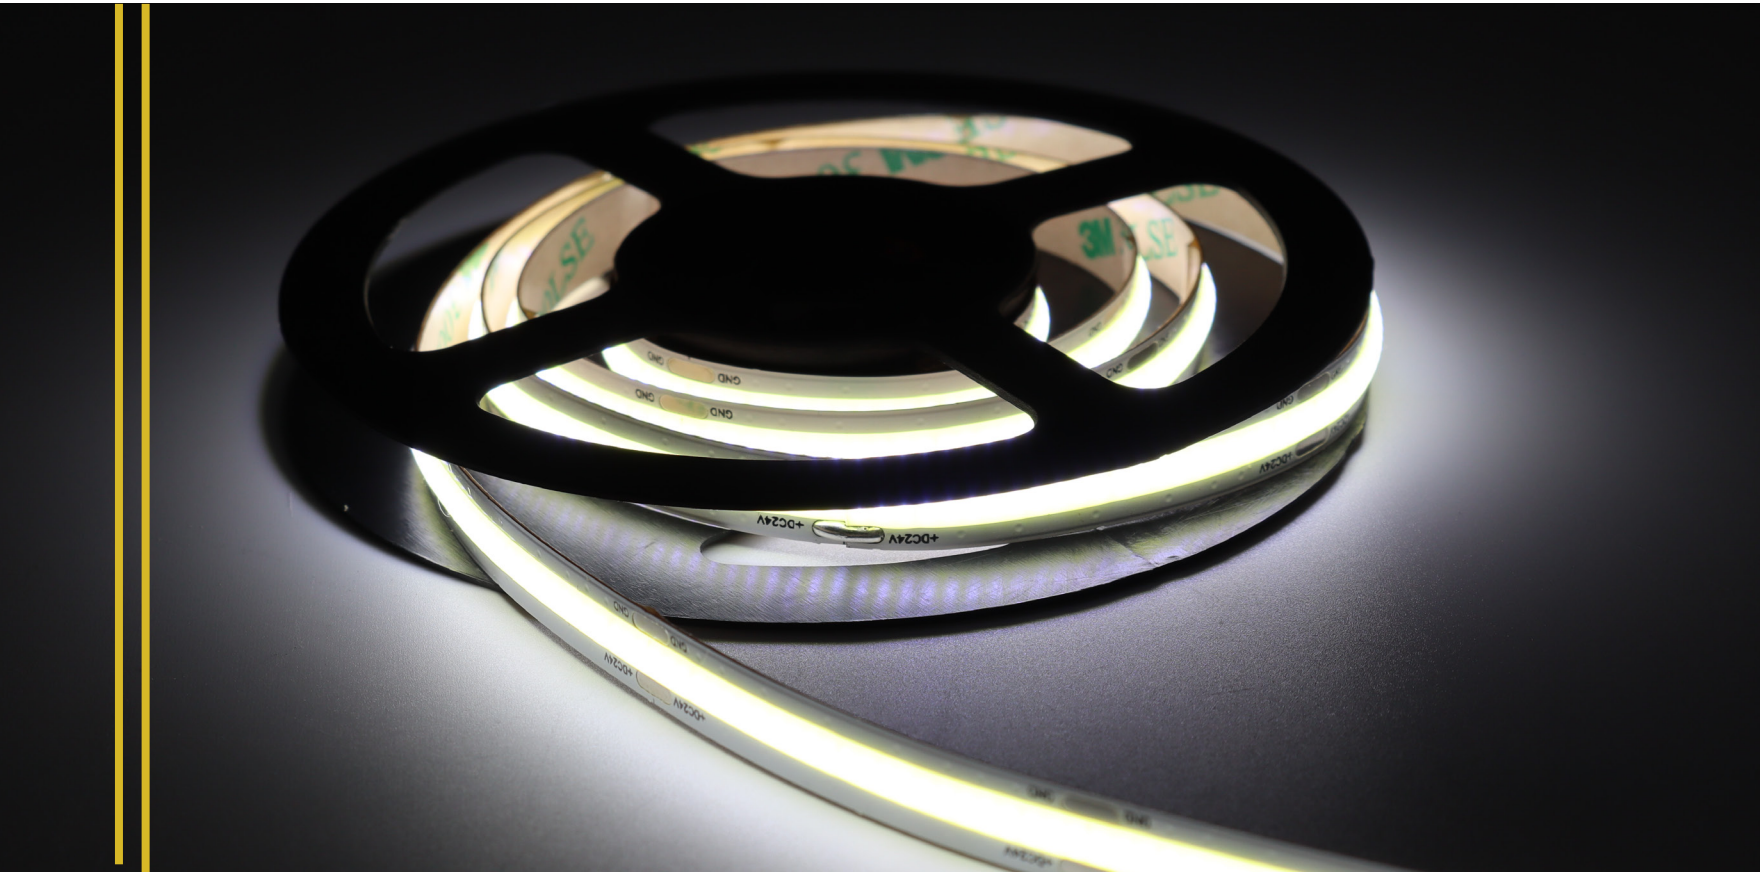

Photobiological risk group EN 62471



LED

24 VDC
10 W/m
45mm CUTTING
~1100 Lm / M
MAX LENGTH 5M
DIMMER
528 LED/m
IP20 IP67

24V - IP20 - CRI>80

COB528LED3000.20
COB528LED4000.20
COB528LED6000.20

Warm white 3000K
Neutral white 4000K
Cool white 6000K

24V - IP67 - CRI>80

COB528LED3000.67
COB528LED4000.67
COB528LED6000.67

Warm white 3000K
Neutral white 4000K
Cool white 6000K

24V - IP20 - CRI>90


COB.90.528LED3000.20
COB.90.528LED4000.20
COB.90.528LED6000.20

Warm white 3000K
Neutral white 4000K
Cool white 6000K

24V - IP67 - CRI>90

COB.90.528LED3000.67
COB.90.528LED4000.67
COB.90.528LED6000.67

Warm white 3000K
Neutral white 4000K
Cool white 6000K

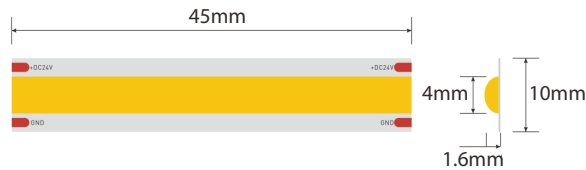

Features self-adhesive 3M™ tape on rear face.