



£231.04


Excl. Tax: £192.53



1


FKM seal and NBR O-rings. Helical bronze gears guarantee constant pressure, heavy duty cycles, less noise and can operate in the absence of liquid. The pumps are supplied with a “High-Speed” setting for Diesel transfer. The integrated SCS control panel allows the switch to the “Low-Speed” mode for the transfer of oil and viscous liquids. Now featuring the Marco 'Integrated Flange' which seals the motor for extended life of the brushes and lowering of electrical consumption.

Description

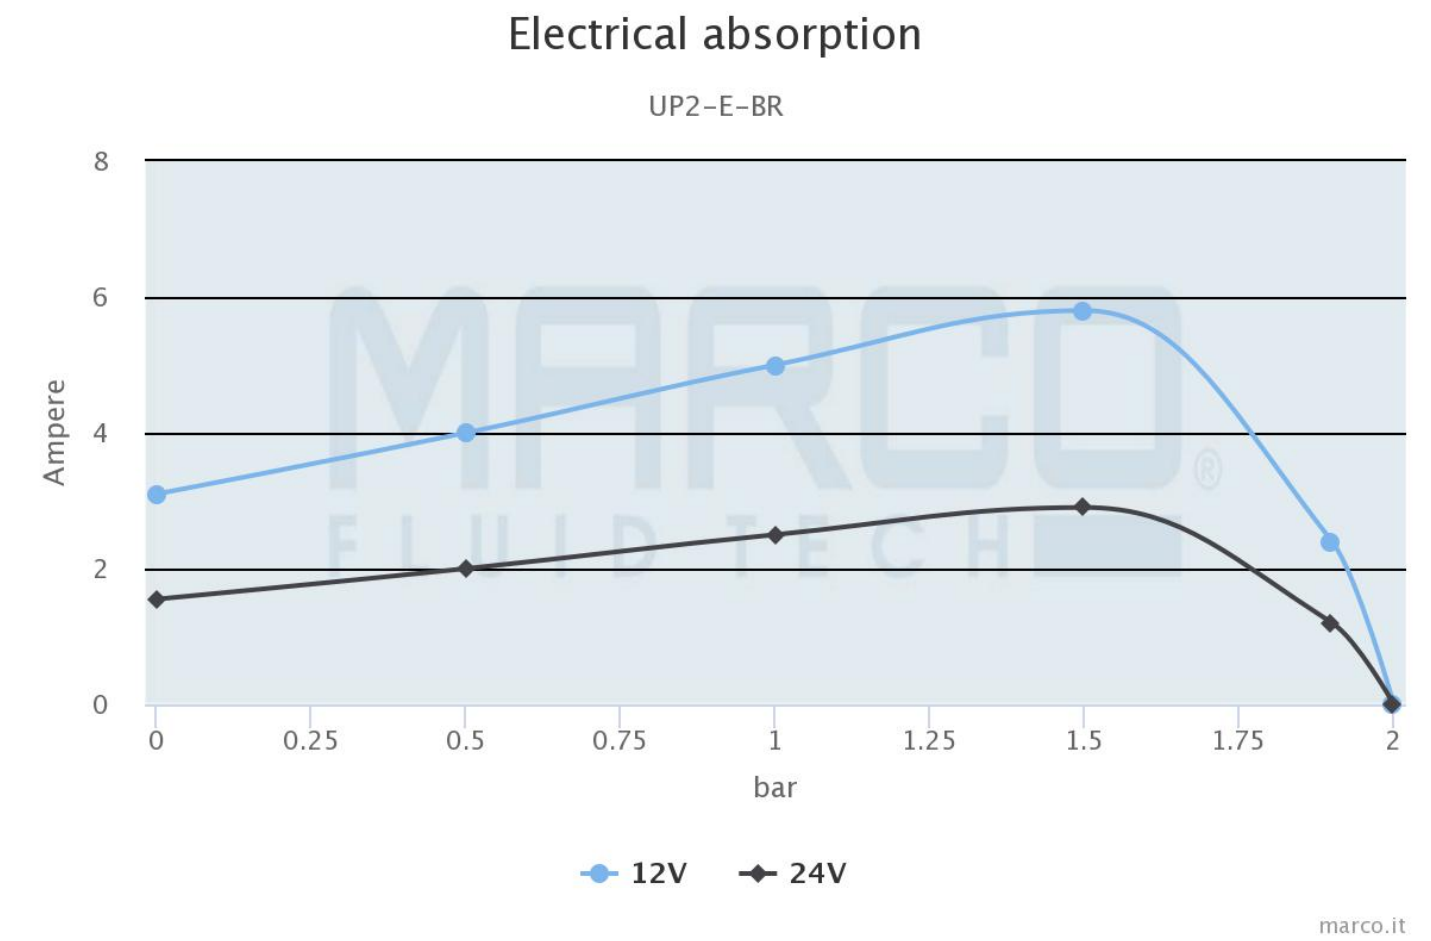

Flow rate

UP2-E-BR

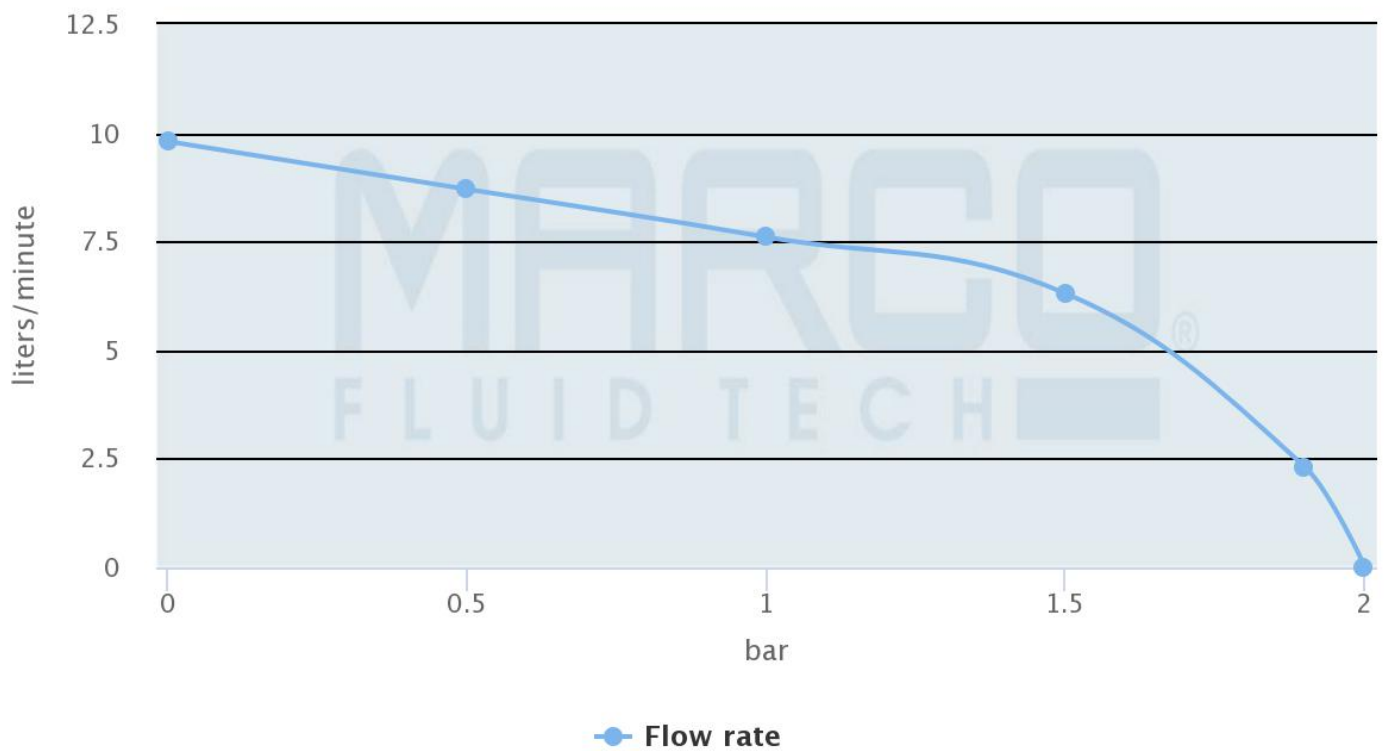

marco.it

Additional Information

Input Voltage	12 / 24Vdc
Flow Rate	10 l/min
Pressure	2 bar
Liquid Type	Oil + diesel
Power Consumption	3 / 1.5 Amps
Motor Power	90W
Fuse	7.5 Amps
Hose Connection	12mm
Weight (kg)	1.660000
Manufacturer	Marco

