




# Volans 70 Adjustable Spotlight

From **£204.05** Excl. Tax: £170.04

#### **Product Images**

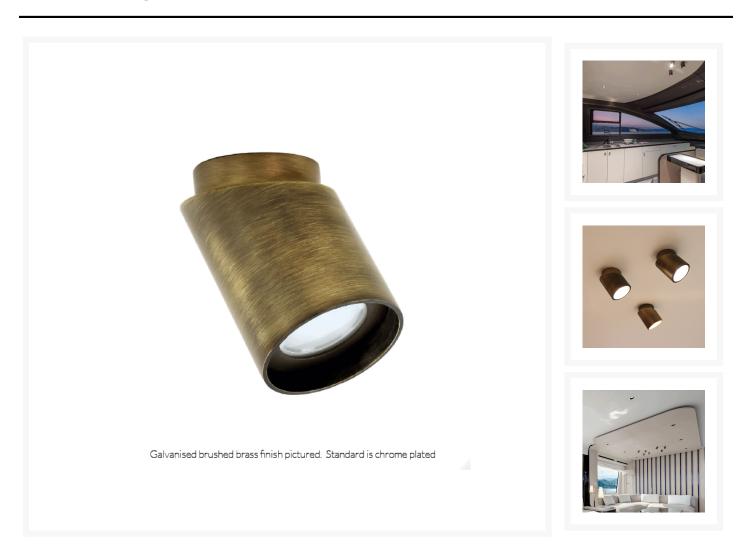

### **Short Description**

The Volans range of adjustable spotlights is an important group of products within our lighting range. The surface mounted design of the fittings combined with the ability to adjust the direction of output make them perfect luminaires in an anti-glare lighting plan. No recess depth is required to fit the products which also means that they can be installed in areas where there is no space above headlinings or ceiling panels.

The Volans 70 fitting is not only suitable for use as a spotlight but can also double up as a reading light.


As standard the fitting is supplied in a chrome plated finish. The item is photographed here in a galvanised brushed brass finish which is available on request and may be subject to a minimum order quantity.

- Adjustable surface mounted spotlight
- 56° lens offers a medium light pattern
- Chrome plated finish standard (brush galvanised brass photographed- special order)
- 10-30Vdc input
- Dimmable

#### Description





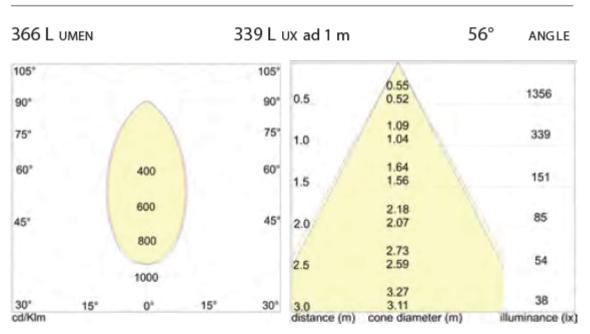

Weight (kg)0.85000ManufacturerForesti & SuardiInstallationSuface MountedLight Element TypePower LEDAngle30°Luns Angle56°Lux Level at 1 Metre39.00Lumens36.00Matage50°Vattage50°Input Voltage90.00Input Voltage10.30VdcInput Solard1920Parting70.00Finish60.00mmFixing Dimensions60.00mm		
InstallationSurface MountedInstallationPower LEDLight Element Type30°AngleSo <sup>°</sup> Luns AngleSo <sup>°</sup> Lux Level at 1 Metre39.00LumensSo <sup>°</sup> Lumens Per Watt (Lm)So <sup>°</sup> VattageSvCRI>90.00Iput VoltageIo3 OvacIput SoltageYaPattingYaDinmerYaBezel Size (mm)ØrKinsChrome	Weight (kg)	0.850000
Light Element Type     Power LED       Angle     30°       Lens Angle     5°       Lux Level at 1 Metre     3300       Lumens     366.00       Lumens Per Watt (Lm)     32.02       Vattage     5°       Input Voltage     500       Input Voltage     90.03       Inmer     120       Inmer     120       Finsh     07.00	Manufacturer	Foresti & Suardi
Angle30°Lens Angle56°Lux Level at 1 Metre39.00Lumens366.00Lumens Per Watt (Lm)73.20Wattage5WCRI>90.00Input Voltage10-30VdcIP RatingIP20DimmerYesBezel Size (mm)Ø7.00LinshChrome	Installation	Surface Mounted
Lens Angle56°Lux Level at 1 Metre339.00Lumens366.00Lumens Per Watt (Lm)73.20Wattage5WCRI>90.00Input Voltage10-30VdcIP RatingIP20DimmerSeel Size (mm)FinishChrome	Light Element Type	Power LED
Lux Level at 1 Metre339.00Lumens366.00Lumens Per Watt (Lm)73.20Wattage5WCRI>90.00Input Voltage10-30VdcIP RatingIP20DimmerYesBezel Size (mm)Ø70.00FinishChrome	Angle	30°
Lumens366.00Lumens Per Watt (Lm)73.20Wattage5WCRI>90.00Input Voltage10-30VdcIP RatingIP20DimmerYesBezel Size (mm)Ø70.00FinishChrome	Lens Angle	56°
Lumens Per Watt (Lm)73.20Wattage5WCRI>90.00Input Voltage10-30VdcIP RatingIP20DimmerYesBezel Size (mm)Ø70.00FinishChrome	Lux Level at 1 Metre	339.00
Wattage5WCRI>90.00Input Voltage10-30VdcIP RatingIP20DimmerYesBezel Size (mm)Ø70.00FinishUmmer	Lumens	366.00
CRI>90.00Input Voltage10-30VdcIP RatingIP20DimmerYesBezel Size (mm)Ø70.00Finish	Lumens Per Watt (Lm)	73.20
Input Voltage10-30VdcIP RatingIP20DimmerYesBezel Size (mm)Ø70.00Finish	Wattage	5W
IP RatingIP20DimmerYesBezel Size (mm)Ø70.00FinishChrome	CRI	>90.00
DimmerYesBezel Size (mm)Ø70.00FinishChrome	Input Voltage	10-30Vdc
Bezel Size (mm) Ø70.00   Finish Chrome	IP Rating	IP20
Finish Chrome	Dimmer	Yes
	Bezel Size (mm)	Ø70.00
Fixing Dimensions Ø60.00mm	Finish	Chrome
	Fixing Dimensions	Ø60.00mm

# **Product Options**

LED Colour:	White 3200°K
	White 4000°K

## **Additional Information**

