





# G 560

## Product Images



## Short Description

- Hydraulic crane with telescopic boom
- Lifting Capacity 560 kg
- Powder coated steel structure
- Hydraulic movement for rotation, boom extension, luffing and hoisting cable
- Slewing  $180^{\circ} \div 270^{\circ}$
- Counterweight with rubber inserts for cable tension
- Manual retaining system for cable weight whilst cruising

- Water resistant handheld wired control
- Manual pump for emergency

## Description

---

Besenzoni tender recover and launching systems are studied for the handling of water toys and tenders, up to 2 tons in weight. The whole collection of Besenzoni recovering and launching systems has been developed to respond the need of facilitating, simplifying and rationalizing the technical operations of recovering and launching, ensuring safety and security.


## Additional Information

---

Lifting Capacity at Maximum Extension (kg)	560.00
Extended Crane Reach (mm)	4200.00
Crane Jib Reach Retracted (mm)	2800.00
Height (mm)	810.00
Overall Length (mm)	3160.00
Pivot Point to Outer Cowling (mm)	340.00
Cable Drop (mm)	6400.00
Elevated Crane Height (mm)	2750.00
Elevated Crane Reach (mm)	1740.00
Extended Elevated Crane Height (mm)	1070.00
Extended Elevated Crane Reach (mm)	900.00
Lift Angle (°)	50°
Base Length (mm)	1300.00
Base Width (mm)	680.00
Manufacturer	Besenzoni

---

Rotation Angle:	180°
	270°

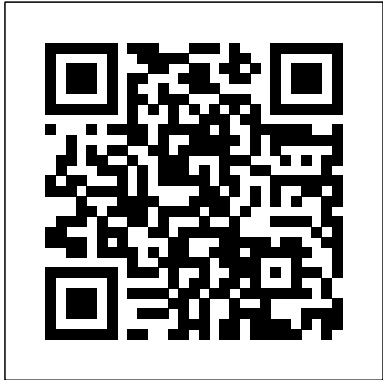

**Product Options**