







6x12mm Mini Side View Neon Flex - Constant Voltage

From
£227.40
Excl. Tax: £189.50

Product Images

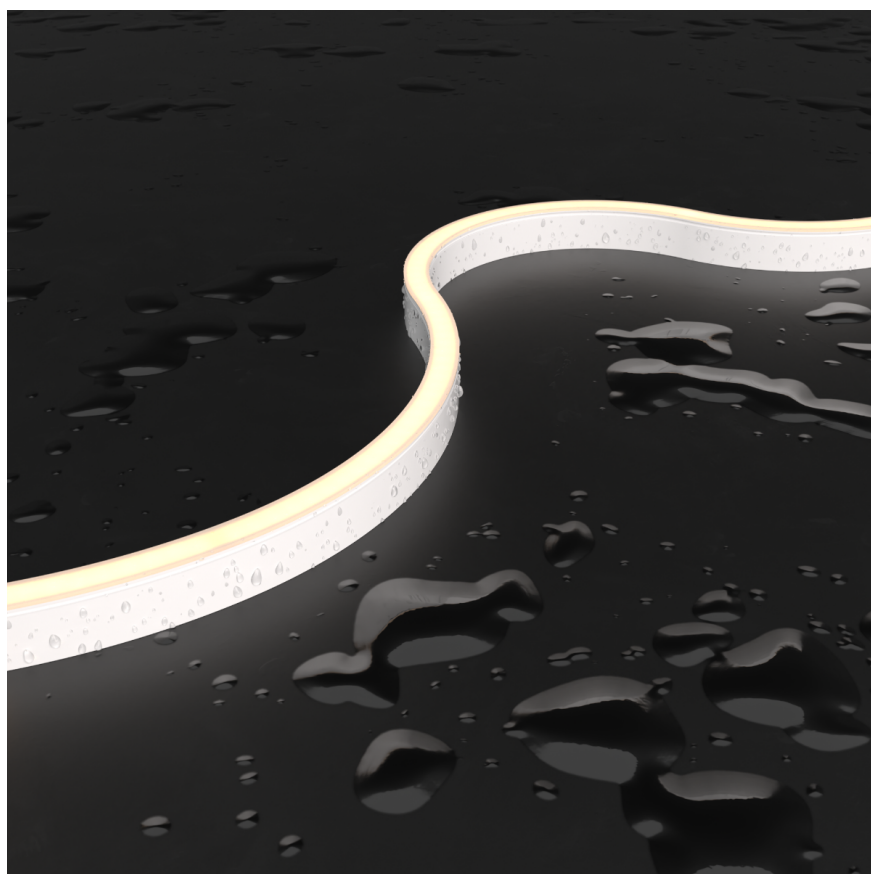





Short Description

Mini neon effect LED strip light with single colour output. Narrow design at only 6mm wide. This neon flex is available for sale online in 10 metre reels which can be cut to length and the [end caps](#) and [connectors](#) applied (sold separately).


- IP67 rated casing with IP67 connectors and end caps
- Uniform neon light output
- 120° beam output
- White in choice of 2700°K, 3000°K, 4000°K available from stock, 5000°K or 6000°K upon request
- Available in static colours such as blue, red, green, yellow, amber
- 2 year warranty

- Dimmable with Dali, DMX, PWM
- Side view light output - perpendicular flex to direction of light
- Can be custom made to order in specified lengths (multiples of 50mm units)

Description





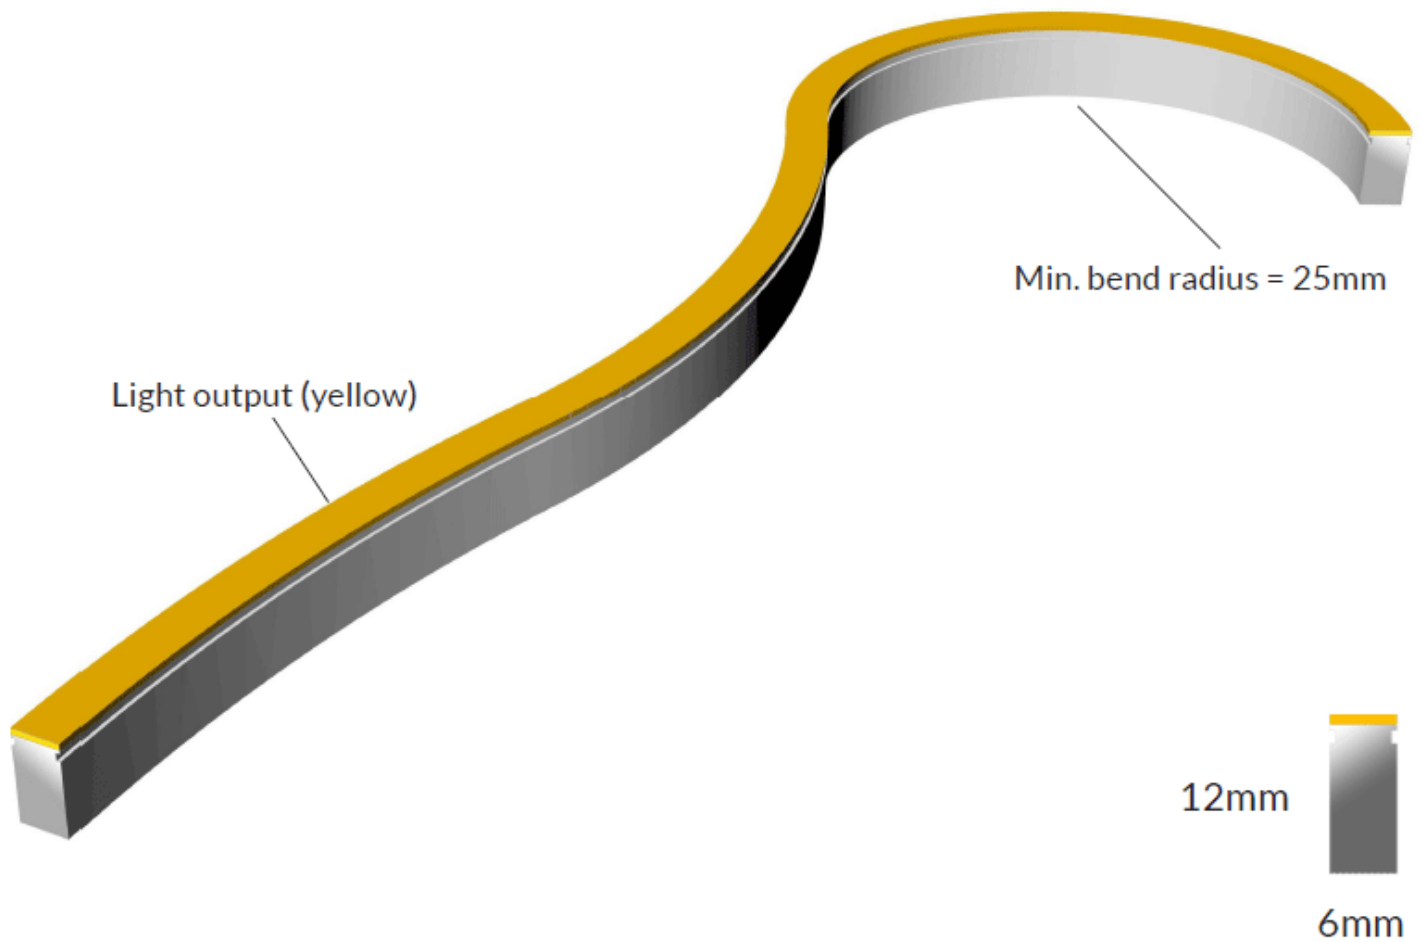

6x12mm Side View Neon - 5 Watt / Metre

IP67 | silicone construction | 12Vdc available on request

Code	CCT	CRI	Lm/M	Watt/M	Cut Unit	Min. Bend Radius	Max. Length Powered From Single End	Voltage	Type
NFS0612CV.5.24V.2100	2000-2200K	>90	150	5	50mm	25mm	5m Single Power Input	24Vdc	CV
NFS0612CV.5.24V.2400	2300-2500K	>90	170	5	50mm	25mm	5m Single Power Input	24Vdc	CV
NFS0612CV.5.24V.2700	2600-2800K	>90	180	5	50mm	25mm	5m Single Power Input	24Vdc	CV
NFS0612CV.5.24V.3000	2900-3100K	>90	155	5	50mm	25mm	5m Single Power Input	24Vdc	CV

NFS0612CV.5.24V.3500	3400-3700K	>90	170	5	50mm	25mm	5m Single Power Input	24Vdc	CV
NFS0612CV.5.24V.4000	3800-4300K	>90	190	5	50mm	25mm	5m Single Power Input	24Vdc	CV
NFS0612CV.5.24V.5000	4800-5300K	>90	190	5	50mm	25mm	5m Single Power Input	24Vdc	CV
NFS0612CV.5.24V.6000	5900-6400K	>90	190	5	50mm	25mm	5m Single Power Input	24Vdc	CV
NFS0612CV.5.24V.R	Red 620-625nm		82	5	50mm	25mm	5m Single Power Input	24Vdc	CV
NFS0612CV.5.24V.G	Green 515-525nm		240	5	50mm	25mm	5m Single Power Input	24Vdc	CV
NFS0612CV.5.24V.B	Blue 460-465nm		30	5	50mm	25mm	5m Single Power Input	24Vdc	CV
NFS0612CV.5.24V.Y	Yellow 585-595nm		60	5	50mm	25mm	5m Single Power Input	24Vdc	CV
NFS0612CV.5.24V.P	Pink		80	5	50mm	25mm	5m Single Power Input	24Vdc	CV
NFS0612CV.5.24V.RGB	RGB		125	5	62.5mm	25mm	5m Single Power Input	24Vdc	CV
NFS0612CV.5.24V.CCT2260	2200-6000K	>90	270	5	50mm	25mm	5m Single Power Input	24Vdc	CV
Code	CCT	CRI	Lm/M	Watt/M	Cut Unit	Min. Bend Radius	Max. Length Powered From Single End	Voltage	Type

NFS0612CC.5.24V.2100	2000-2200K	>90	150	5	50mm	25mm	19m Single Power Input	24Vdc	CC
NFS0612CC.5.24V.2400	2300-2500K	>90	170	5	50mm	25mm	19m Single Power Input	24Vdc	CC
NFS0612CC.5.24V.2700	2600-2800K	>90	180	5	50mm	25mm	19m Single Power Input	24Vdc	CC
NFS0612CC.5.24V.3000	2900-3100K	>90	155	5	50mm	25mm	19m Single Power Input	24Vdc	CC
NFS0612CC.5.24V.3500	3400-3700K	>90	170	5	50mm	25mm	19m Single Power Input	24Vdc	CC
NFS0612CC.5.24V.4000	3800-4300K	>90	190	5	50mm	25mm	19m Single Power Input	24Vdc	CC
NFS0612CC.5.24V.5000	4800-5300K	>90	190	5	50mm	25mm	19m Single Power Input	24Vdc	CC
NFS0612CV.5.24V.6000	5900-6400K	>90	190	5	50mm	25mm	19m Single Power Input	24Vdc	CC
NFS0612CC.5.24V.R	Red 620-625nm		82	5	50mm	25mm	25m Single Power Input	24Vdc	CC
NFS0612CC.5.24V.G	Green 515-525nm		240	5	50mm	25mm	19m Single Power Input	24Vdc	CC
NFS0612CC.5.24V.B	Blue 460-465nm		30	5	50mm	25mm	19m Single Power Input	24Vdc	CC
NFS0612CC.5.24V.Y	Yellow 585-595nm		60	5	50mm	25mm	25m Single Power Input	24Vdc	CC
NFS0612CC.5.24V.P	Pink		80	5	50mm	25mm	19m Single Power Input	24Vdc	CC

6x12mm Side View Neon - 10 Watt / Metre

IP67 | silicone construction | 12Vdc available on request

Code	CCT	CRI	Lm/M	Watt/M	Cut Unit	Min. Bend Radius	Max. Length Powered From Single End	Voltage	Type
NFS0612CV.10.24V.2100	2000-2200K	>90	245	10	50mm	25mm	5m Single Power Input	24Vdc	CV
NFS0612CV.5.24V.2400	2300-2500K	>90	310	10	50mm	25mm	5m Single Power Input	24Vdc	CV
NFS0612CV.5.24V.2700	2600-2800K	>90	355	10	50mm	25mm	5m Single Power Input	24Vdc	CV
NFS0612CV.5.24V.3000	2900-3100K	>90	300	10	50mm	25mm	5m Single Power Input	24Vdc	CV
NFS0612CV.5.24V.3500	3400-3700K	>90	330	10	50mm	25mm	5m Single Power Input	24Vdc	CV
NFS0612CV.5.24V.4000	3800-4300K	>90	360	10	50mm	25mm	5m Single Power Input	24Vdc	CV
NFS0612CV.5.24V.5000	4800-5300K	>90	360	10	50mm	25mm	5m Single Power Input	24Vdc	CV
NFS0612CV.5.24V.6000	5900-6400K	>90	360	10	50mm	25mm	5m Single Power Input	24Vdc	CV
NFS0612CV.5.24V.R	Red 620-625nm		160	10	50mm	25mm	5m Single Power Input	24Vdc	CV
NFS0612CV.5.24V.G	Green 515-525nm		400	10	50mm	25mm	5m Single Power Input	24Vdc	CV

NFS0612CV.5.24V.B	Blue 460-465nm		51	10	50mm	25mm	5m Single Power Input	24Vdc	CV
NFS0612CV.5.24V.Y	Yellow 585-595nm		125	10	50mm	25mm	5m Single Power Input	24Vdc	CV
NFS0612CV.5.24V.P	Pink		145	10	50mm	25mm	5m Single Power Input	24Vdc	CV
NFS0612CV.5.24V.RG B	RGB		125	10	62.5mm	25mm	5m Single Power Input	24Vdc	CV
NFS0612CV.5.24V.RG BW	RGBW 2700K 3000K 4000K 5000K	>90	245	10	50mm	25mm	5m Single Power Input	24Vdc	CV
NFS0612CV.5.24V.CC T2260	2200-6000K	>90	270	10	50mm	25mm	5m Single Power Input	24Vdc	CV

Additional Information

Weight (kg)	0.800000
Lens Type	Opal
Unit of Sale	10 Metre Reel
Light Element Type	SMD LED
Material	Silicone
Lens Angle	120°
Width (mm)	6.00
Height (mm)	12.00
Input Voltage	24Vdc
IP Rating	IP67
Dimmer	Yes
LEDs Per Metre	120
CRI	>90
Cutting Intervals (mm)	50.00
Lumens Per Watt (Lm)	25.00
Luminous Flux (lm/M)	250.00
Strip LED Type	Flexible Neon

Product Options

Wattage:	10W / Metre
	5W / Metre
LED Colour:	White 2700°K
	White 3000°K
	White 4000°K

