



# Fast Lock - Rapid Fender Tie System

**£200.48**

Excl. Tax: £167.07

## Product Images



## Short Description

The *Fast Lock* system uses a push and twist method to quickly and securely fasten the removable top section to its base. This securing design has been used in this rapid fender tie system.

Compatible with up to an Ø8mm rope, the top *Fast Lock* section can remain permanently fastened to the fender. When mooring, the fender can be quickly secured into position without the need to tie knots.


This product contains a specialist Viton™ seal to prevent water from entering and passing through the fitting. It is a watertight solution. The small hole in the base of the product is to allow the air to escape when engaging the top section.

- Polished 316 grade stainless steel
- Heavy duty securing method for fenders
- Watertight design
- Fast push and twist action to secure
- Supplied with nut and washer for fixing

## Description

---

## Drawing

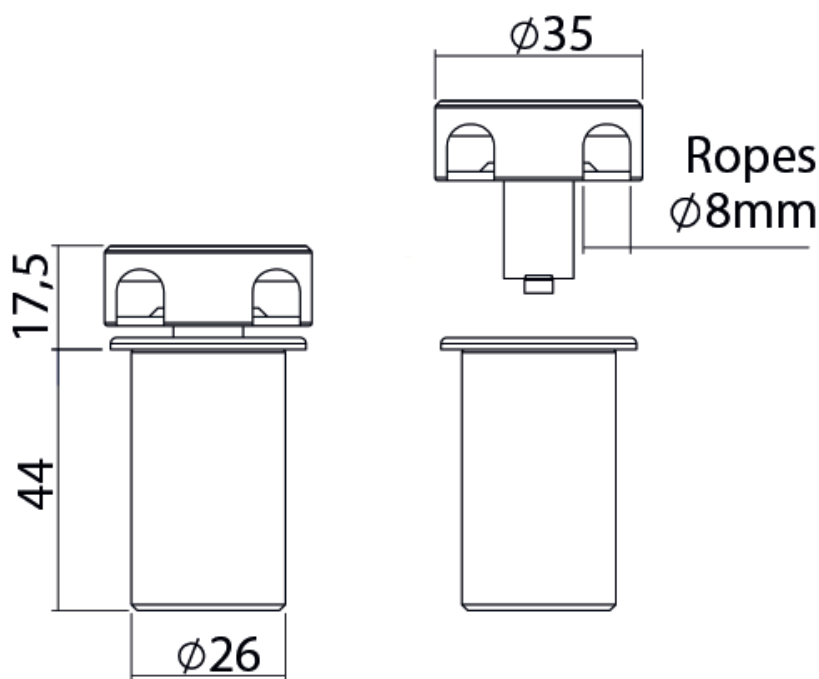

## High Performance

Manufactured entirely from 316-grade stainless steel, the rapid fender tie system is built to last. The product is built to withstand the harsh marine environment on deck and has been salt tested throughout development to ensure its quality. The product is first electro-polished to ensure all surfaces are protected from corrosion. Following complete electro-polishing, the visible elements are then hand polished to provide a beautiful finish and superior corrosion resistance.

A key element to the design of the product is its Viton™ internal gasket. This important component has been carefully selected for its durability and performance, providing a watertight seal around the moving central pin. This gasket guarantees the watertight characteristic of the product. Due to the quality of the seal, a small air release hole is required in the base of the product to allow the compressed air to escape when the product is operated.

The push and twist design of the interlocking parts ensures a very strong connection.

### Additional Information

Cut-out (mm)	Ø26.00
Diameter (mm)	35.00
Finish	316 Stainless Steel
Manufacturer	Foresti & Suardi
Weight (kg)	0.220000

