



# M2 Marine 6.5" Full Range Speakers -ColorOptix™ - White

**Regular Price** 


£514.91 Special

Price

£360.43

Excl. Tax: £300.36

### **Product Images**

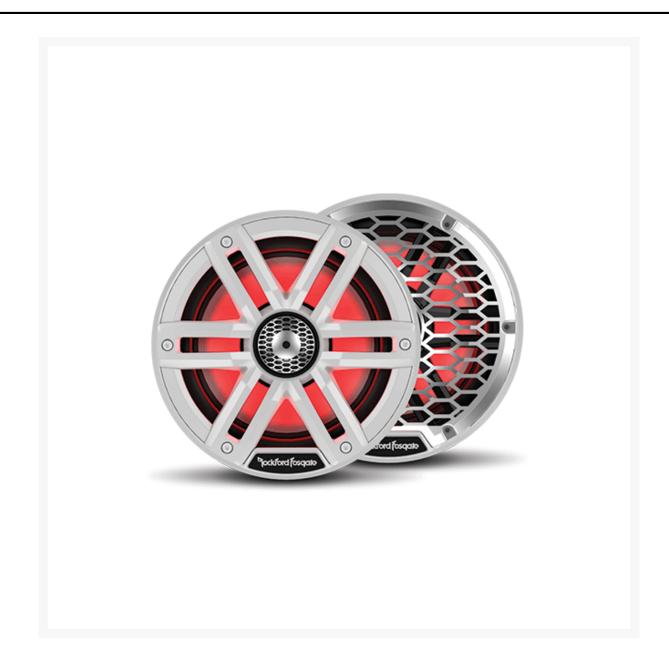

#### **Short Description**

The M2-65 Color Optix™ 2-way 6.5" speakers deliver loud, clear, accurate sound, and light the way for your journey! The speakers connect with the Rockford Fosgate Color Optix™ Controller and RF Connect App, allowing you to customize your own color patterns. The Element Ready™ design and IP67 certification makes them truly purpose-built for marine or motorsport applications where protection from damaging UV rays and water spray is essential. Includes both standard and stainless steel grille inserts.

#### **Description**

The M2 series of Element Ready™ speakers are designed to pair with the Rockford Fosgate Color Optix™ Controller and RF Connect App through its Deutsch™ and Amphenol™ connectors integrated into the speaker. This combined with their IP67 certification make these speakers Element Ready™ and truly purpose built for marine applications. To complete your sound experience, the M2 speakers are complimented by 10-inch Infinite Baffle subwoofers, also controlled through the Color Optix™ lighting system.

- Integrated 1" (25 mm) tweeter with dual neodymium magnet motor
- Laminated "PXNX" Dome tweeter
- 1" (25mm) High Temp Kapton™ Woofer Voice Coil Former
- Ultra-high temperature PA66 with 30% glass-fill injection-moulded frame with UV inhibitors
- Gold plated Marine grade brass terminals provide a corrosion resistant connection
- Proprietary Dual Function Input Terminals
- Integrated Deutsch RGB and Speaker receptacles
- Vented motor design with water-repelling nano coated mesh screen
- 100% UV Stable Centrex plastic grill
- Linear Aramid-Polyester Composite Spider
- Fully insulated silicone tinsel leads
- UV and Salt-Fog resistant TPE (Thermo-Plastic Elastomer) surround
- VAST vertical attach surround technique increases effective radiating cone area up to 25%
- Injection moulded mineral filled polypropylene cone body with UV inhibitors
- Co-moulded surround and cone body
- 12dB/Oct Crossover network
- Fully sealed integrated concealed crossover (ICC) network
- Metallized Polyester Film Capacitors
- Optically clear UV stable Encapsulated LED PCB
- Multiplexed RGB Input
- Optically clear UV stable RGB Lighting Encapsulation
- Ultra-Bright, Wide Angle Tri-Colour Surface Mount LED's with Flat Mould Lenses
- 2-Year Warranty

## **Additional Information**

Weight (kg)	2.250000
Manufacturer	Rockford Fosgate
Finish	White
Speaker Type	2-Way Coax
Speaker Size	6.5"
Speaker Impedance	4-Ohms
Crossover	High-Pass (HP): 12dB/Octave
Power Handling (Watts RMS)	150 Watts RMS 600 Watts Peak
Tweeter Size	1.0" (25 mm)
Tweeter Size  Recess Diameter (mm)	1.0" (25 mm) 136.20
Recess Diameter (mm)	136.20
Recess Diameter (mm)  Depth (mm)	136.20 63.20
Recess Diameter (mm)  Depth (mm)  Speaker Input Connector	136.20 63.20 Deutsch™

