



# Luna TRG Spotlight

From **£204.17** Excl. Tax: £170.14

#### **Product Images**



The Luna spotlight range contains some of our most advanced LED technology in an elegant adjustable spotlight. The Luna TRG is the largest of the adjustable anti-glare family and features a powerful 5 watt LED module. The Nichia<sup>™</sup> LED chip produces a very high quality LED output with an average colour rendering index of 95. The spotlight is waterproof from both the front and rear and is available in various lens angles and colour temperatures. The TRG features a bezel free design for applications where a minimalist fitting is required. It is notable that the *Luna TRG* can be specified in custom RAL colours if installations require a spotlight that matches in with ceiling colour\*. As standard, the spotlight is available in an all-black finish or a chrome and black finish.

- Interior & exterior spotlight with chrome plated bezel
- Adjustable fitting max. 16° tilt
- Excellent anti-glare properties with recessed LED source
- Galvanised brass face, chrome plated
- Custom finishes available on request
- Tempered glass lens
- Anodised aluminium heatsink
- Multiple lens angles available
- Available in numerous white colour temperatures as well as red
- CRI>90


\*minimum order quantities may apply for this customisation.

#### Description

Photometric data shown below for *Plutone TG* spotlight which shares same output as *Luna TRG*. Photometric data for various lens angles shown below:

## PLUTONE TG - T90 - TRG


art./ref. 5289 - 5290 - 5293

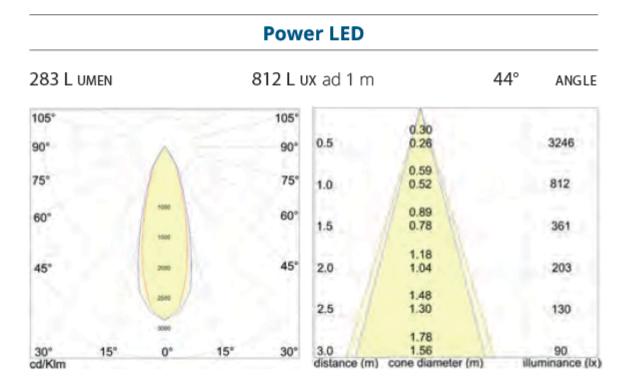

### **PLUTONE TG - T90 - TRG** art./ref. 5289M - 5290M - 5293M

Power LED						
276 L umen		885 L ux ad 1 m				ANG LE
105°		105* 0.25				
90°	À	90*	0.5	0.25		3539
75°	$ \land $	75°	1.0	0.49 0.44		885
60°	1600	60'	1.5	0.74 0.66		393
45°	2400	45°	2.0	0.98 0.88		221
	V		2.5	1.23 1.10		142
30° 15°	0*	15° 30°	3.0	1.47 1.32	1	98
od/Kim			distance (r		r (m) illu	minance (Ix

#### **PLUTONE TG - T90 - TRG** art./ref. 5289N - 5290N - 5293N

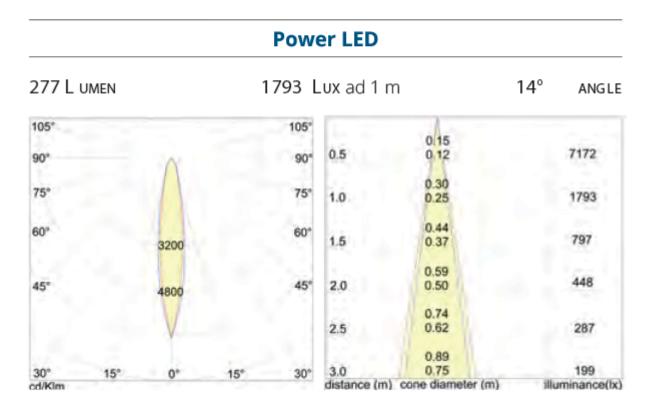

#### **Additional Information**

Weight (kg)	0.300000
Manufacturer	Foresti & Suardi
Installation	Recessed
Light Element Type	Power LED
Rotation Angle	± 16°
Wattage	5W
CRI	>90
Input Voltage	10-30Vdc
IP Rating	IP65
Dimmer	Yes
Bezel Size (mm)	Ø78.00
Cut-out Size (mm)	Ø78.00
Depth (mm)	57.00

### **Product Options**

LED Colour:	White 2700°K
	White 3200°K
	White 4000°K
	Red
Lens Angle:	14°
	29°
	44°
Finish:	Chrome
	Black

