





Ultra-Mini Top View Neon Flex - IP67 - 6 x 6mm

Product Images

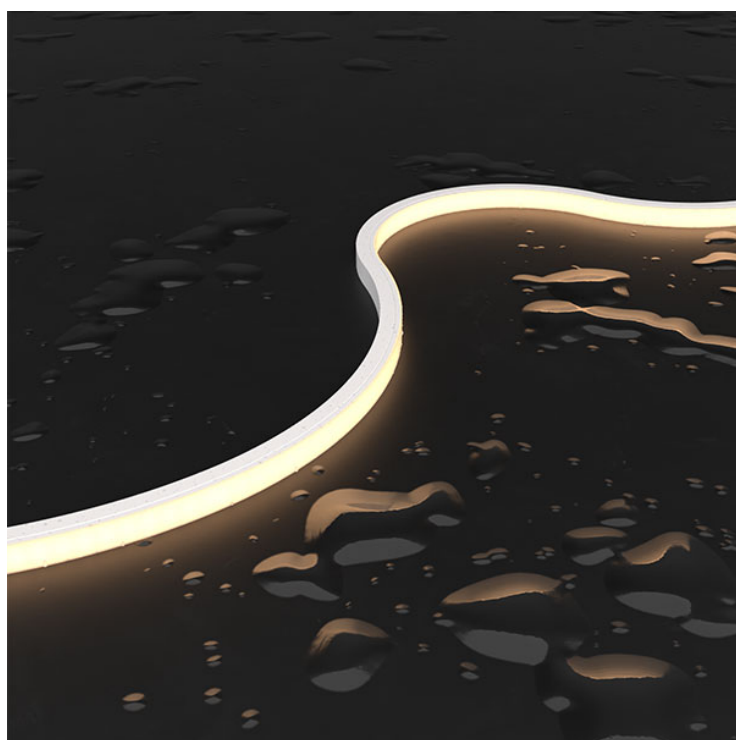

Short Description


Silicone flexible neon LED strip with constant voltage chip technology. This is one of the slimmest neon flex solutions available on the market. At only 6mm wide, this neon flexible linear luminaire can be easily incorporated into most projects without the need for large channels or installation space.

This LED neon is made from silicone rubber which has excellent light transmitting characteristics and is very strong. The strip LED emits a seamless light with no dots or shadowing. It is also IP67 rated and resistant to salt, weak acid and alkali corrosion, corrosive gases and UV damage.

Description





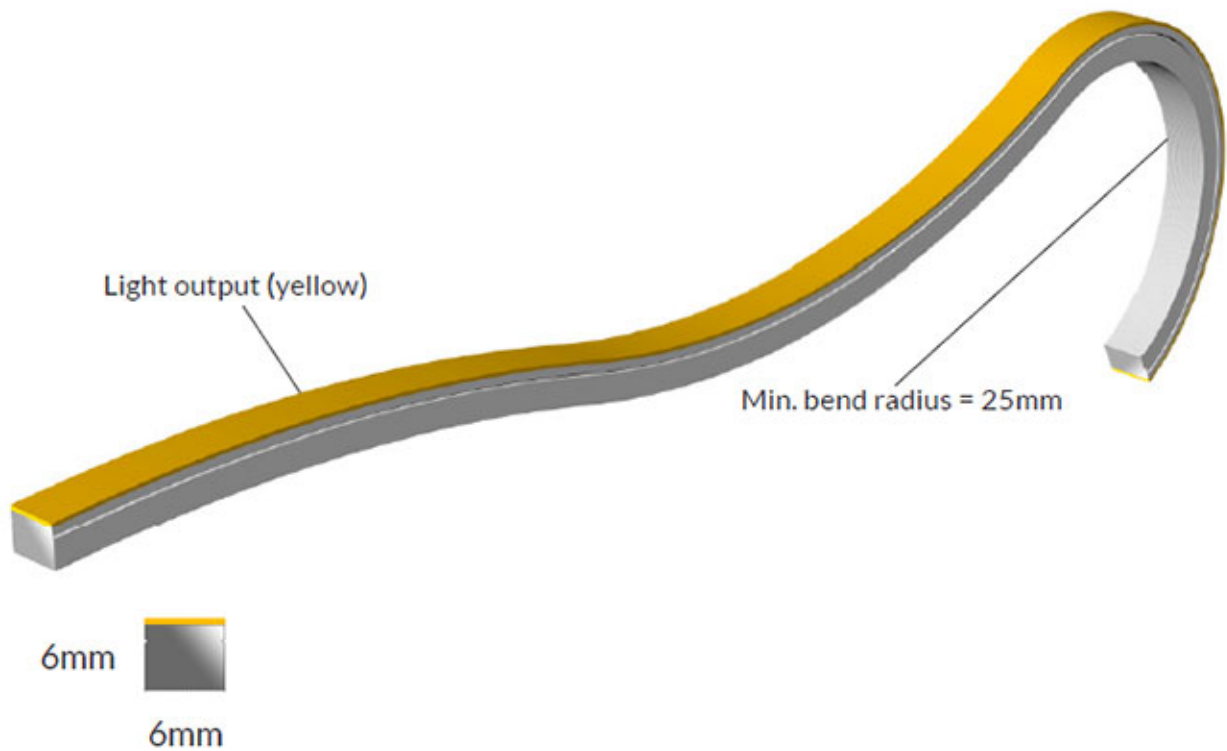

6x6mm Ultra-Mini Top View Neon

Silicone construction IP67 Dimmable 12Vdc available on request Constant current version also available


Code	CCT	CRI	LM/m	Watt/M	Cut Unit	Min. Bend Radius	Max. Length	Voltage	Type
NFT0606CV.6.24V.2400	2300-2500	>90	330	6	25mm	25mm	5m Single Power Input	24Vdc	CV
NFT0606CV.6.24V.2800	2700-2900	>90	345	6	25mm	25mm	5m Single Power Input	24Vdc	CV
NFT0606CV.6.24V.3200	3000-3400	>90	348	6	25mm	25mm	5m Single Power Input	24Vdc	CV
NFT0606CV.6.24V.3800	3500-4100	>90	358	6	25mm	25mm	5m Single Power Input	24Vdc	CV
NFT0606CV.6.24V.4400	4100-4700	>90	353	6	25mm	25mm	5m Single Power Input	24Vdc	CV

Constant current version available for lengths above 5 metres powered from a single end

Code	Description
NFT0606.EC1B	DIY IP67 silicone end cap for 6x6mm top view
NFT0606.S1B.300	DIY IP67 silicone side connector for 6x6mm top view - 300mm cable
NFT0606.B1B.300	DIY IP67 silicone bottom connector for 6x6mm top view - 300mm cable
NFT0606.E1B.300	DIY IP67 silicone end connector for 6x6mm top view - 300mm cable
NFT0606.UA1	Aluminium 1m U mounting channel for 6x6mm top view
NFT0606.UAC	Aluminium U mounting clip for 6x6mm top view

Custom cable lengths over 300mm available on request.
DIY silicone end caps achieve IP67 rating when correctly installed with wet silicone.



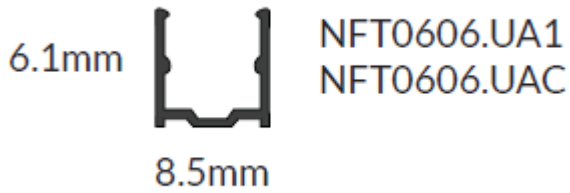

Additional Information

Light Element Type	SMD LED
Material	Silicone
Wattage	6 W / Metre
Input Voltage	24Vdc
IP Rating	IP67
Dimmer	Yes
CRI	>90
Cutting Intervals (mm)	25mm
Strip LED Type	Flexible Neon

